

T-CONNECTOR M12




- ▶ Serially connects two or several vacuum switches, VS4128, into one common output to the PLC or BUS-I/O.
- ▶ Quick and simple installation with standard male to female M12 eurofast cable assemblies.
- ▶ Suitable if the PLC or BUS-I/O is limited to one or two input signals from a vacuum system with several vacuum switches.

TECHNICAL DATA

Description	Unit	Value
Material		TPU, Zn
Temperature range	°C	-25 – 90
Weight	g	25
Voltage, max	VDC	60
Safety classification		IP65
Current, max	A	4
Humidity	%RH	90
Electric connection		3x M12 4-pin
Dimension, WxDxH	mm	56x14,7x33

ORDERING INFORMATION

Description	Art. No.
T-connector M12 male, 2xM12 female	0119558

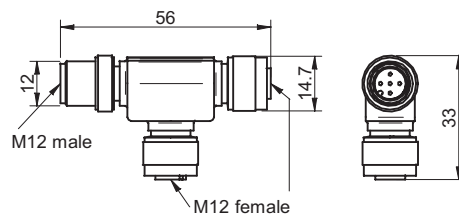

ORDERING INFORMATION, ACCESSORIES

Description	Art. No.
Cable M12 4-pin female, M12 4-pin male, PUR, L=2	0118322