



Check valve series

SHCV, SOCV, SOACV, SACV Series



HIGH PRESSURE CHECK VALVES

SHCV SERIES —



Features

- Pressure rating up to 6,000psig(413bar) at 70 °F (20°C)
- Temperature rating up to 375 °F (190°C) with viton seal standard
- Cracking pressure fixed from 1/3 to 25psig (0.02 to 1.7bar)
- Variety of end connections
- 316 stainless steel body material as standard.
- Each and every valve is tested at the factory.

Technical Data —

Series	Orifice (mm)	Working and Back Pressure @70 °F(20°C)	Flow Coefficient Cv	Nominal Cracking Pressure	
SHCV1	4.8	6000psig (413bar)	0.67	1/3, 1, 5, 10, 25 psig (0.02, 0.06, 0.34, 0.68, 1.7 bar)	
SHCV2	7.8		1.80		
SHCV3	15.0	5000psig (344bar)	4.70		

Seal Materials —


Material	Temperature Rating	Designator
Viton	-10 °F to 375 °F (-23°C to 190°C)	Standard
NBR	-10 °F to 250 °F (-23°C to 121°C)	N
Ethylene Propylene	-50 °F to 300 °F (-45°C to 148°C)	E

To order add the seal material designator to the ordering number.
ex) SHCV1-S-8-1P-N

Cracking Pressure and Reseal Pressure at 70 °F (20°C)

Nominal Spring Size psig(bar)	Cracking Pressure Range psig(bar)	Min. Reseal Pressure psig(bar)	Designator
1/3 (0.02)	0~3 (0~0.20)	6 (0.41) back pressure	1/3P
1 (0.068)	0~4 (0~0.27)	5 (0.34) back pressure	1P
5 (0.34)	3~9 (0.20~0.62)	2 (0.13) back pressure	5P
10 (0.68)	7~15 (0.48~1.0)	3 (0.20)	10P
25 (1.7)	20~30 (1.3~2.0)	17 (1.1)	25P

Materials of Construction —

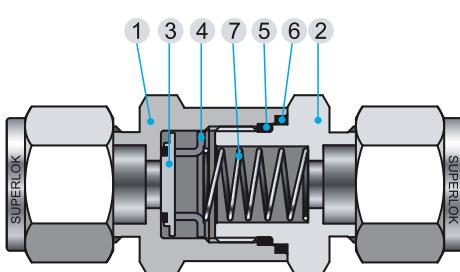

No.	Component	Material
1	Inlet Body	SS316
2	Outlet Body	SS316
3	Poppet	Viton-bonded SS316
4	Poppet Stopper	SS316
5	O-Ring	Viton standard
6	Packing	PTFE
7	Spring	SS304

Testing

All valves are factory tested for cracking pressure and reseal performance.

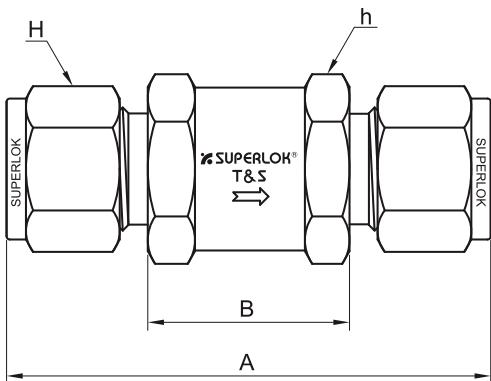


Table of Dimensions

Order Number		Orifice (mm)	Cv Max.	End Connection	Pressure Rating psig (bar)	Dimensions (mm)			
Series	Part No.					A	B	H	h
SHCV1	S-2	4.8	0.67	1/8" SUPERLOK	6000 (413)	57.7	26.4	11.11(7/16)	17.46 (11/16)
	S-4			1/4" SUPERLOK		61.7		14.29(9/16)	
	S-6M			6mm SUPERLOK		54.1		14	
	F-4N			1/4" FEMALE NPT		45.5	26.4	-	
	M-2N			1/8" MALE NPT		55.1		-	
	M-4N			1/4" MALE NPT		69.9	31.2	17.46(11/16)	
SHCV2	S-6	7.8	1.8	3/8" SUPERLOK	6000 (413)	75.2		22.22(7/8)	25.4(1) 26.9(1-1/16)
	S-8			1/2" SUPERLOK		68.6		16	
	S-8M			8mm SUPERLOK		71.1		19	
	S-10M			10mm SUPERLOK		75.2		22	
	S-12M			12mm SUPERLOK		5000 (344)	-	-	
	F-6N			3/8" FEMALE NPT	4600 (316)	64.8		-	
	F-8N			1/2" FEMALE NPT		77.0		-	
	M-6N			3/8" MALE NPT		59.9	31.2	-	
	M-8N			1/2" MALE NPT	6000 (413)	69.3		-	
SHCV3	S-12	15	4.7	3/4" SUPERLOK	5000 (344)	89.4	45.2	28.58(1-1/8)	41.28 (1-5/8)
	S-16			1" SUPERLOK	4700 (323)	98.6	45.5	38.1(1-1/2)	
	S-22M			22mm SUPERLOK	5000 (344)	88.4		32	
	S-25M			25mm SUPERLOK		98.6		40	
	F-12N			3/4" FEMALE NPT	4300 (296)	82.0		-	
	F-16N			1" FEMALE NPT	4100 (282)	97.3		-	
	M-12N			3/4" MALE NPT	5000 (344)	83.6	45.5	-	
	M-16N			1" MALE NPT		93.2	45.7	-	

Dimensions, shown on the above table, are measured based on finger-tight.

All dimensions are for reference only, subject to change.

Ordering information

LOK-SHCV2 - **S** - **6** - **1P** - **SS**

1 2 3 4 5

1 : Valve Series 2 : End Connection Type 3 : Connection Size 4 : Cracking Pressure Designator
5 : Body Material Designator [SS : 316 stainless steel(standard), B : Brass]

ONE-PIECE CHECK VALVES

SOCV SERIES



Features


- One-piece Body
- Working pressure up to 3000 psig (206bar)
- Temperature rating up to 375 °F (190°C) with viton seal standard.
- Cracking pressure fixed from 1/3 to 25psig (0.02 to 1.7 bar)
- NPT and ISO pipe end connections
- 316 stainless steel and brass materials
- Each and every valve is tested at the factory.

Technical Data

Nominal Cracking Pressure	1/3, 1, 10 and 25psig (0.02, 0.06, 0.68, 1.7bar)
Maximum Working Pressure at 70 °F (20 °C)	3000psig (206bar)
Maximum Back Pressure at 70 °F (20 °C)	3000psig (206bar)
Flow Coefficient (Cv)	SOCV1 / SOCV2 : 0.35 SOCV3 / SOCV4 : 1.20
Temperature Rating	VITON O-ring : -10 °F to 375 °F (-23 °C to 190 °C) NBR O-ring : -10 °F to 250 °F (-23 °C to 121 °C) (add "N" to the end of ordering number)

Cracking Pressure and Reseal Pressure


SOCV Series Valves with nominal cracking pressure of 20 psig (1.3 bar) or lower may require back pressure to reseal bubble-tight.

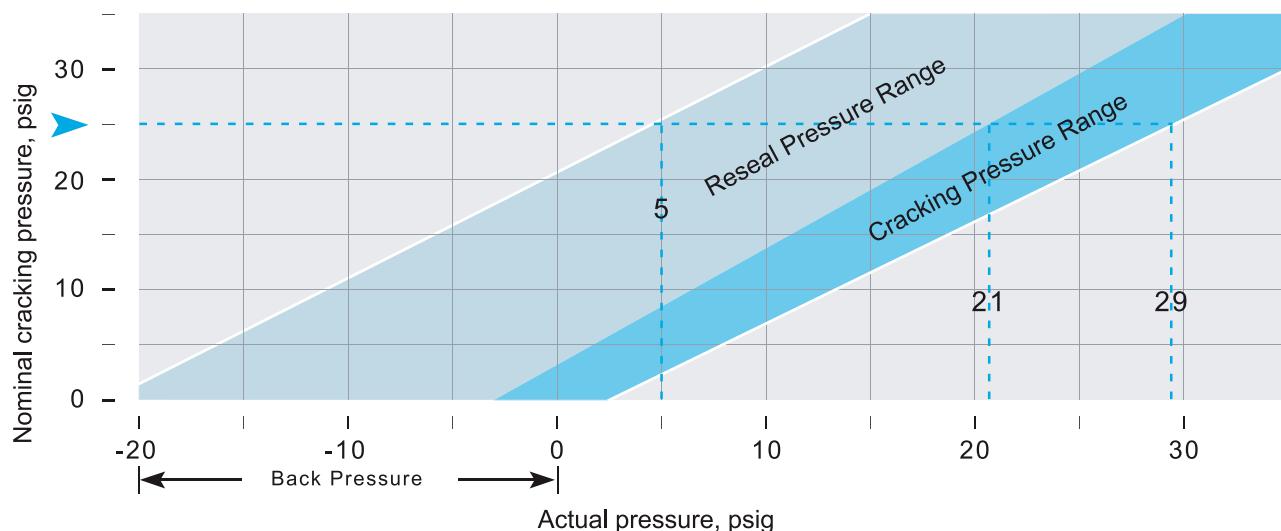

Testing

All valves are factory tested for cracking pressure and reseal performance.


Table of Dimensions

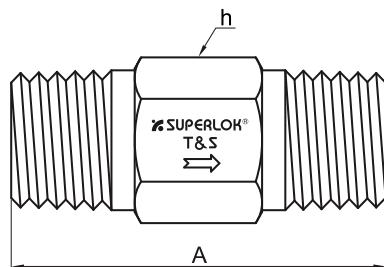

Order Number		End Connection		A	h Hex mm (in.)
Series	Part No.	Inlet	Outlet		
SOCV1	M-4N	1/4 Male NPT	1/4 Male NPT	41.2	14.29 (9/16)
	M-4R	1/4 Male ISO	1/4 Male ISO		
SOCV2	F-4N	1/4 Female NPT	1/4 Female NPT	61.2	19.05 (3/4)
	F-4R	1/4 Female ISO	1/4 Female ISO	64.5	
	MF-4N	1/4 Male NPT	1/4 Female NPT	44.5	
	FM-4N	1/4 Female NPT	1/4 Male NPT	58.2	
SOCV3	M-8N	1/2 Male NPT	1/2 Male NPT	57.9	22.22 (7/8)
SOCV4	F-8N	1/2 Female NPT	1/2 Female NPT	94.2	26.9 (1-1/16)
	MF-8N	1/2 Male NPT	1/2 Female NPT	71.9	

All dimensions are for reference only, subject to change.

Materials of Construction

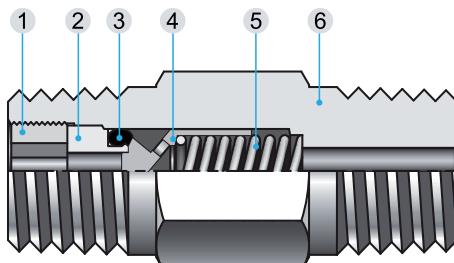

No.	Component	Valve Body Materials	
		Stainless steel	Brass
1	Insert Lock Screw	316SS / A276	Brass
2	Insert	316SS / A276	Brass
3	O-Ring	VITON	NBR
4	Poppet	316SS / A276	Brass
5	Spring	SS304	
6	Body	316SS / A276	Brass

Ordering information

LOK-SOCV1 - M - 4N - 1P - SS

1 2 3 4 5

1 : Valve Series 2 : End Connection Type 3 : Connection Size

4 : Cracking Pressure Designator(1/3P : 1/3psig, 1P : 1psig, 10P : 10psig, 25P : 25psig)

5 : Body Material Designator [SS : 316 stainless steel(standard), B : Brass]

ONE-PIECE ADJUSTABLE CHECK VALVES

SOACV SERIES




Features

- One-Piece body
- Working pressure up to 3000psig (206 bar)
- Cracking pressure adjustable from 3 to 600psig (0.2 to 41.3bar)
- NPT and ISO pipe end connections in 1/4 and 1/2 in. sizes
- 316 stainless steel and brass materials
- Each and every valve is tested at the factory.

Technical Data

Series	SOACV1 / SOACV2	SOACV3
Cracking Pressure Ranges	3 to 50psi (0.2 to 3.4bar) 50 to 150psi (3.4 to 10.3bar) 150 to 350psi (10.3 to 24.1bar) 350 to 600psi (24.1 to 41.3bar)	
Working and Back Pressure at 70 °F (20 °C)		3000psig (206bar)
Temperature Rating	VITON O-Ring : -10 °F to 375 °F (-23 °C to 190 °C) NBR O-Ring : -10 °F to 250 °F (-23 °C to 121 °C)	
Flow Coefficient (Cv)	0.35	1.20


Cracking and Reseal Pressure at 70 °F (20 °C)

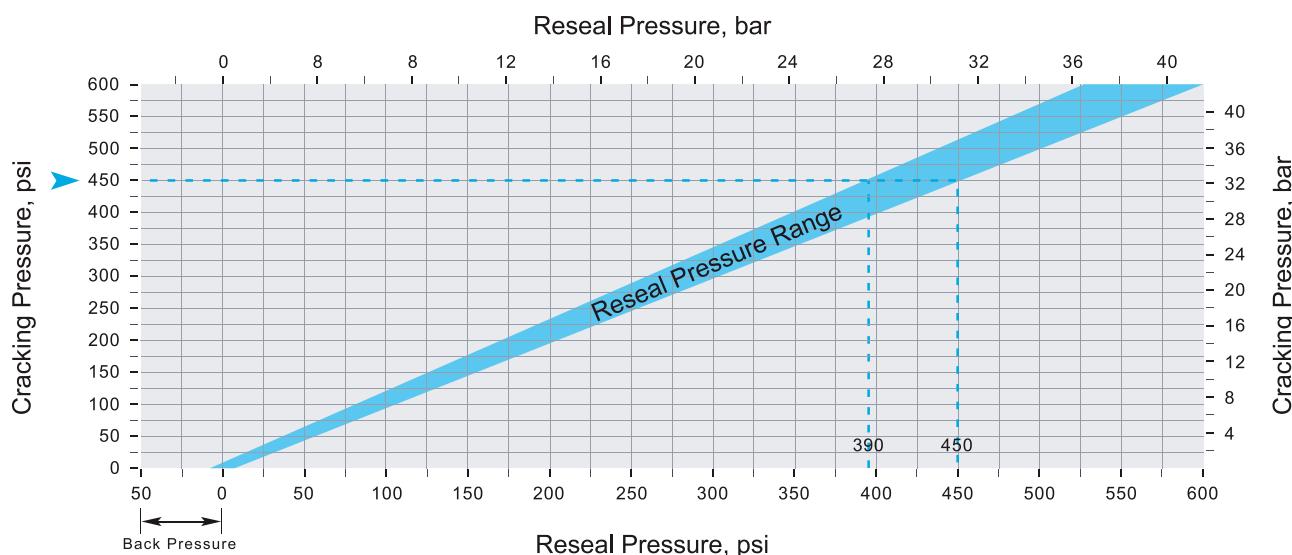

Testing

All valves are factory tested for cracking pressure and reseal performance.


Table of Dimensions

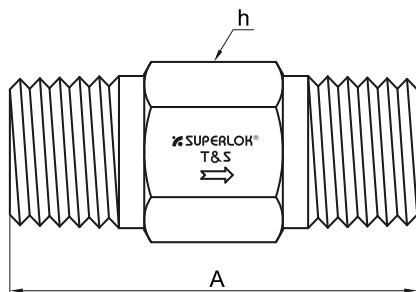

Order Number		End Connections	A(mm)	h HEX mm (in.)
Series	Part No.			
SOACV1	M-4N	1/4 Male NPT	41.1	14.29 (9/16)
	M-4R	1/4 Male ISO	41.1	14.29 (9/16)
SOACV2	F-4N	1/4 Female NPT	75.7	19.05 (3/4)
SOACV3	M-8N	1/2 Male NPT	65.0	22.22 (7/8)
	M-8R	1/2 Male ISO	65.0	22.22 (7/8)

All dimensions are for reference only, subject to change.

Materials of Construction

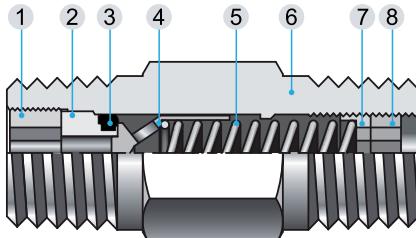

No.	Component	Valve Body Materials	
		Stainless steel	Brass
1	Insert Lock Screw	316SS / A276	Brass
2	Insert	316SS / A276	Brass
3	O-Ring	VITON	NBR
4	Poppet	316SS / A276	Brass
5	Spring	SS304	
6	Body	316SS / A276	Brass
7	Adjusting screw	316SS / A276	Brass
8	Locking screw	316SS / A276	Brass

Ordering information

LOK-SOACV1 - M - 4N - A - SS

1

2

3

4

5

1 : Valve Series 2 : End Connection Type 3 : Connection Size

4 : Cracking Pressure Designator (A : 3~50 psi, B : 50~150 psi, C : 150~350 psi, D : 350~600psi)

5 : Body Material Designator [SS : 316 stainless steel(standard), B : Brass]

ADJUSTABLE CHECK VALVE

SACV SERIES




Features

- Working pressures up to 3000 psig (206 bar)
- Temperature range from -10°F to 375°F (-23°C to 191°C) with Viton Seal
- Cracking pressures adjustable from 3 to 600psi (0.2 to 41.3bar)
- Variety of end connections
- 316 stainless steel and brass materials
- Each and every valve is tested at the factory.

Technical Data

Series	SACV
Cracking Pressure Ranges	3 to 50psi (0.2 to 3.4bar) 50 to 150psi (3.4 to 10.3bar) 150 to 350psi (10.3 to 24.1bar) 350 to 600psi (24.1 to 41.3bar)
Working and Back Pressure at 70°F (20°C)	3000psig (206bar)
Temperature Rating	VITON O-Ring : -10°F to 375°F (-23°C to 190°C) NBR O-Ring : -10°F to 250°F (-23°C to 121°C)
Flow Coefficient (Cv)	0.37


Cracking and Reseal Pressure at 70°F (20°C)

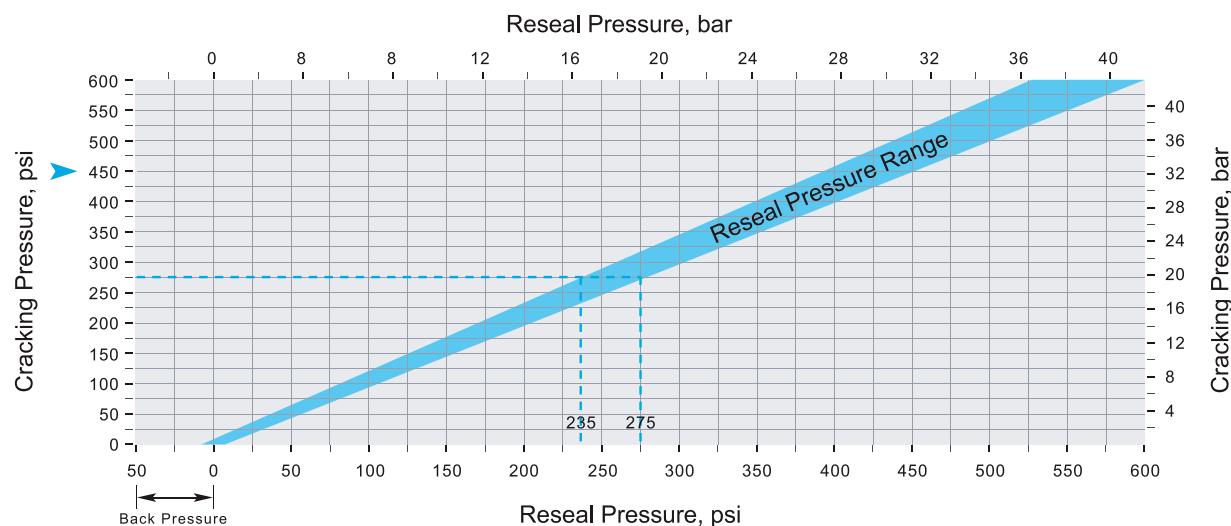

Testing

All valves are factory tested for cracking pressure and reseal performance.


Table of Dimensions

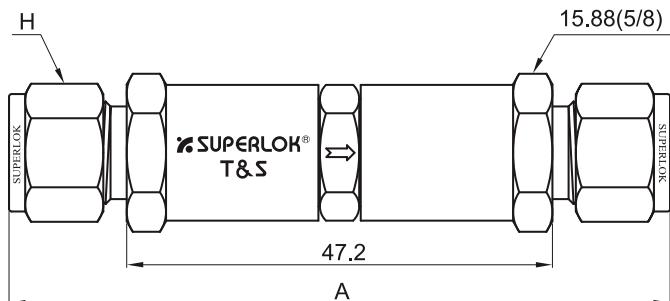

Part No.	End Connections		A (mm)	H mm(in.)
	Inlet	Outlet		
SACV	S-4	1/4" SUPERLOK	82.0	14.29 (9/16)
	S-6M	6mm SUPERLOK		14
	S-8M	8mm SUPERLOK	84.3	16
	M4N-S4	1/4 Male NPT	79.2	14.29 (9/16)

All dimensions are for reference only, subject to change.

Materials of Construction

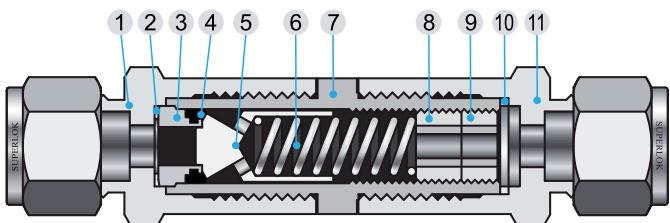

No.	Component	Valve Body Materials	
		Stainless steel	Brass
1	Inlet body	316SS / A276	Brass
2	Inlet gasket	PTFE - coated 316SS	
3	Insert	316SS / A276	Brass
4	O-Ring	VITON	NBR
5	Poppet	316SS / A276	Brass
6	Spring	SS304	
7	Center body		Brass
8	Adjust screw	316SS / A276	316SS / A276
9	Locking screw		
10	Outlet gasket	PTFE - coated 316SS	
11	Outlet Body	316SS / A276	Brass

Ordering information

LOK-SACV - S - 4 - A - SS

1

2

3

4

5


1 : Valve Series

2 : End Connection Type

3 : Connection Size

4 : Cracking Pressure Designator (A : 3~50 psi, B : 50~150 psi, C : 150~350 psi, D : 350~600psi)

5 : Body Material Designator [SS : 316 stainless steel(standard), B : Brass]

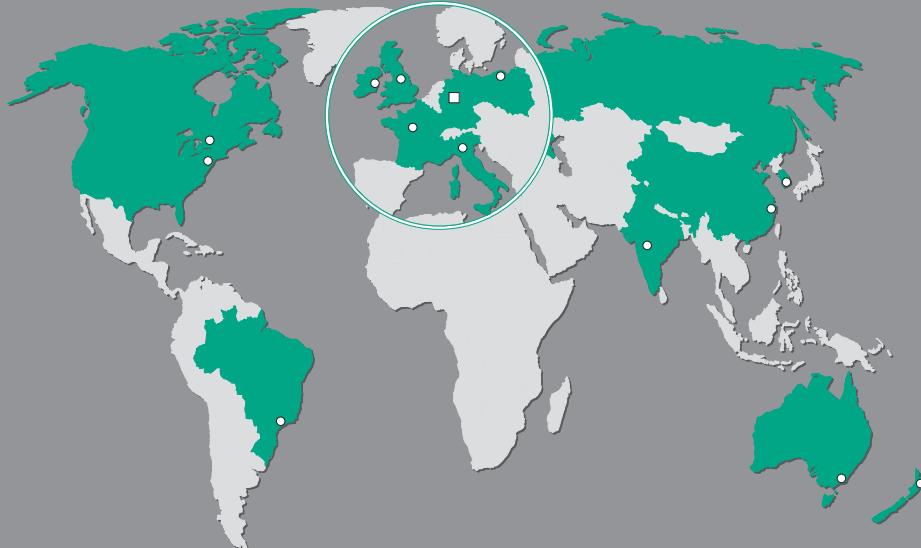

AUSTRALIA

STAUFF Corporation Pty. Ltd.
P. O. Box 227
Unanderra, NSW, 2526
24-26 Doyle Avenue
Unanderra, Wollongong, NSW, 2526
Tel.: +61 2 4271 18 77
Fax: +61 2 4271 84 32
sales@stauff.com.au

BRAZIL

STAUFF Brasil Ltda.
Avenida Gupê 10767
Galpão 2 - Bloco A
Barueri - São Paulo
CEP 06422-120
Tel.: +55 11 47 72 72 00
Fax: +55 11 47 72 72 10
stauff@stauffbrasil.com

CANADA

STAUFF Canada Ltd.
866 Milner Avenue
Scarborough
Ontario M1B 5N7
Tel.: +1 416 282 46 08
Fax: +1 416 282 30 39
sales@stauffcanada.com

CHINA

STAUFF International Trading
(Shanghai) Co., Ltd.
No. 41-42, Lane 369, Chuang Ye Road
Jushuo Industrial Zone, Kang Qiao
Shanghai, 201319
Tel.: +86 21 68 18 70 00
Fax: +86 21 68 18 71 36
info@stauff.com.cn

FRANCE

STAUFF S.A.S.
230, Avenue du Grain d'Or
Z.I. de Vineuil - Blois Sud
41354 Vineuil-cedex
Tel.: +33 2 54 50 55 50
Fax: +33 2 54 42 29 19
direction@stauffsa.com

GERMANY

WALTER STAUFFENBERG GmbH & Co. KG

P. O. Box 1745 Tel.: +49 23 92 916-0
D-58777 Werdohl Fax: +49 23 92 2505
Im Ehrenfeld 4 filtrationtechnology@stauff.com
D-58791 Werdohl www.stauff.com

INDIA

STAUFF India Pvt. Ltd.
Gat. No. 2340
Pune Nagar Road, Wagholi
Pune, 412207
Tel.: +91 20 6620 2473
Fax: +91 20 2705 1567
sales@stauffindia.com

ITALY

STAUFF Italia s.r.l.
Viale Nuova Valassina 78
angolo Via Baragiola sn
20033 Desio (MI)
Tel.: +39 0362 63 80 70
Fax: +39 0362 63 80 69
sales@stauff.it

IRELAND

STAUFF Ireland Ltd.
Unit B3
Weatherwell Business Park
Clondalkin
Dublin 22
Tel.: +353 1457 4936
Fax: +353 1467 0687
sales@stauff.ie

KOREA

STAUFF Korea Ltd.
1500-12, Dadae-Dong
Saha-Ku
Pusan, 604-826
Tel.: +82 51 266 6666
Fax.: +82 51 266 8866
info@stauff.co.kr

NEW ZEALAND

STAUFF Corporation (NZ) Ltd.
P. O. Box 58517
Greenmount, Auckland
Unit D, 103 Harris Road
East Tamaki, Auckland
Tel.: + 64 9 271 48 12
Fax: + 64 9 271 48 32
info@stauff.co.nz

®

POLAND

STAUFF Polska Sp. z o.o.
Miszewko 43 A
80-297 Banino
Tel.: +48 58 660 11 60
Fax: +48 58 629 79 52
sales@stauff.pl

RUSSIAN FEDERATION

STAUFF LLC
Office 205, Building 7
Scharikopodschipnikovskaya 11
Moscow, 115088
Tel.: +7 495 987 36 29
+7 495 223 89 61
Fax: +7 495 679 90 48
sales@stauff.ru

UNITED KINGDOM

STAUFF UK
500, Carlisle Street East
Off Dowgate Drive
Sheffield, S4 8BS
Tel.: +44 114 251 85 18
Fax: +44 114 251 85 19
sales@stauff.co.uk

UNITED STATES

STAUFF Corporation
7 Wm. Demarest Place
Waldwick, 07463-1542
New Jersey
Tel.: +1 201 444 78 00
Fax: +1 201 444 78 52
sales@stauffusa.com

Globally available through
wholly-owned branches and
distributors in all industrial
countries.