

SRV Series

FEATURES

- Compact design
- Cracking pressure adjustable externally
- Lock wire feature secures a given pressure setting
- Each and every valve is tested at the factory


SET PRESSURE

- Set pressure is the upstream pressure at which the first indication of flow occurs. Set pressure of each valve after initial relief is repeatable within $\pm 5\%$ at room temperature.



SRVL Series

Low Pressure Relief Valve

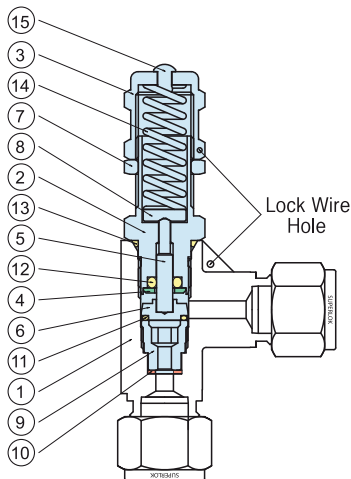

TECHNICAL DATA


- Maximum working pressure : 300 psig (20.6 bar)
- Cracking pressure range : 10~250 psig (0.69~17.2 bar)
- Orifice size : 4.8mm
- One spring for the full set pressure range
- If required spring kit, mention part no : RVL-SG

MATERIALS OF CONSTRUCTION

No.	Description	Material	No.	Description	Material
1	Body	SS 316	9	Seat Retainer	SS 316
2	Bonnet	SS 316	10	Seat	PTFE
3	Cracking Pressure Adjusting Nut	SS 316	11	O-Ring	Viton
4	Retainer	SS 316	12	O-Ring	Viton
5	Stem Shaft	SS 316	13	O-Ring	Viton
6	Stem	SS 316	14	Spring	SS 304
7	Lock Nut	SS 316	15	Cap	Polypropylene
8	Spring Support	SS 316			

SRVH Series

High Pressure Relief Valve

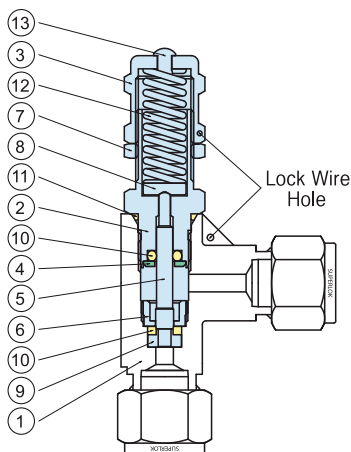

TECHNICAL DATA

- Maximum working Pressure : 6000 psig (413 bar)
- Cracking Pressure Range : 225~6000 psig (15.5~414 bar)
- Orifice size: 4.8mm
- Multiple springs for a selection of set pressure ranges

SRVH Series Spring

Spring Designator	Spring Color	Cracking Pressure		
		psig	bar	kPa
Y	Yellow	225~750	15.5~51.5	1550~5150
P	Purple	750~1500	51.5~103	5150~10300
O	Orange	1500~2250	103~155	10300~15500
B	Brown	2250~3000	155~206	15500~20600
W	White	3000~4000	206~275	20600~27500
R	Red	4000~5000	275~344	27500~34400
G	Green	5000~6000	344~414	34400~41400

※ If required spring kit, mention part no : RVL - - ex)RVH-Y

MATERIALS OF CONSTRUCTION

No.	Description	Material	No.	Description	Material
1	Body	SS 316	8	Spring Support	SS 316
2	Bonnet	SS 316	9	Stem Retainer	SS 316
3	Cracking Pressure Adjusting Nut	SS 316	10	O-Ring	Viton
4	Retainer	SS 316	11	O-Ring	Viton
5	Stem Shaft	SS 316	12	Spring	SS 304
6	Stem Guide	SS 316	13	Cap	Polypropylene
7	Lock Nut	SS 316			

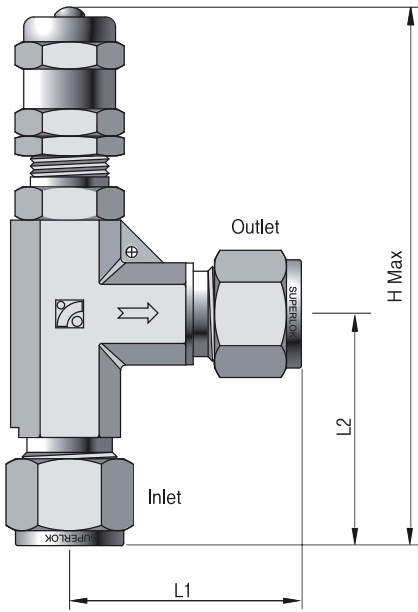


TABLE OF DIMENSIONS

Part Number	Orifice (mm)	End Connection		Dimensions (mm)		
		Inlet	Outlet	L1	L2	H
SRVL or SRVH	S 4	1/4" SUPERLOK		38.7	37.3	104.6
	S 6M	6mm SUPERLOK		38.7	37.3	104.6
	S 8M	8mm SUPERLOK		38.7	37.3	104.6
	S 6	3/8" SUPERLOK		44.4	44.4	111.7
	S 8	1/2" SUPERLOK		46.7	46.7	114.0
	S 12M	12mm SUPERLOK		46.7	46.7	114.0
	MS 8N-8	1/2" Male NPT	1/2" SUPERLOK	46.7	35.7	103.0
	MS 8N-12M	1/2" Male NPT	12mm SUPERLOK	46.7	35.7	103.0
	MF 4N	1/4" Male NPT	1/4" Female NPT	30.0	32.2	99.5
	MF 6N	3/8" Male NPT	3/8" Female NPT	34.5	32.2	99.5
MF 8N	1/2" Male NPT	1/2" Female NPT	38.0	35.7	103.0	

Dimensions shown with SUPERLOK tube fitting nuts finger-tight.
All dimension are for reference only, subject to change.

ORDERING INFORMATION

LOK-SRVH - MS - 8N - 8 - Y - SS

1 2 3 4 5

1. Valve Series

- SRVL : Low Pressure
- SRVH : High Pressure

2. End Connection

- S : Tube Fitting
- MS : Male Pipe Thread & Tube Fitting
- MF : Male Pipe Thread & Female Pipe Thread

3. Inlet and Outlet Connection Size & Type


Fractional	CONNECTION SIZE	1/4"	3/8"	1/2"
	DESIGNATOR	4	6	8
Metric	CONNECTION SIZE	6mm	8mm	12mm
	DESIGNATOR	6M	8M	12M
THREAD		NPT		ISO TAPERED
DESIGNATOR		N		R

4. Spring Designator

- Y : 225 ~ 750 psig
- P : 750 ~ 1500 psig
- O : 1500 ~ 2250 psig
- B : 2250 ~ 3000 psig
- W : 3000 ~ 4000 psig
- R : 4000 ~ 5000 psig
- G : 5000 ~ 6000 psig

5. Body Material

- SS : ASTM A182 F316 (Stainless steel)

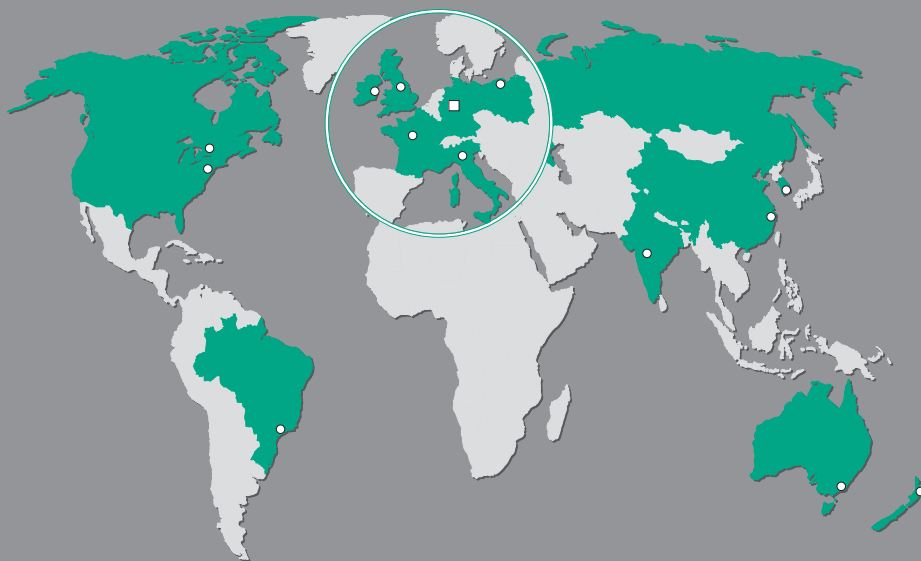
AUSTRALIA

STAUFF Corporation Pty. Ltd.
P. O. Box 227
Unanderra, NSW, 2526
24-26 Doyle Avenue
Unanderra, Wollongong, NSW, 2526
Tel.: +61 2 4271 18 77
Fax: +61 2 4271 84 32
sales@stauff.com.au

INDIA

STAUFF India Pvt. Ltd.
Gat. No. 2340
Pune Nagar Road, Wagholi
Pune, 412207
Tel.: +91 20 6620 2473
Fax: +91 20 2705 1567
sales@stauffindia.com

POLAND

STAUFF Polska Sp. z o.o.
Miszewko 43 A
80-297 Banino
Tel.: +48 58 660 11 60
Fax: +48 58 629 79 52
sales@stauff.pl

BRAZIL

STAUFF Brasil Ltda.
Avenida Gupê 10767
Galpão 2 - Bloco A
Barueri - São Paulo
CEP 06422-120
Tel.: +55 11 47 72 72 00
Fax: +55 11 47 72 72 10
stauff@stauffbrasil.com

ITALY

STAUFF Italia s.r.l.
Viale Nuova Valassina 78
angolo Via Baragiola sn
20033 Desio (MI)
Tel.: +39 0362 63 80 70
Fax: +39 0362 63 80 69
sales@stauff.it

RUSSIAN FEDERATION

STAUFF LLC
Office 205, Building 7
Scharikopodschipnikovskaya 11
Moscow, 115088
Tel.: +7 495 987 36 29
+7 495 223 89 61
Fax: +7 495 679 90 48
sales@stauff.ru

CANADA

STAUFF Canada Ltd.
866 Milner Avenue
Scarborough
Ontario M1B 5N7
Tel.: +1 416 282 46 08
Fax: +1 416 282 30 39
sales@stauffcanada.com

IRELAND

STAUFF Ireland Ltd.
Unit B3
Weatherwell Business Park
Clondalkin
Dublin 22
Tel.: +353 1457 4936
Fax: +353 1467 0687
sales@stauff.ie

UNITED KINGDOM

STAUFF UK
Unit B3
500, Carlisle Street East
Off Downgate Drive
Sheffield, S4 8BS
Tel.: +44 114 251 85 18
Fax: +44 114 251 85 19
sales@stauff.co.uk

CHINA

STAUFF International Trading
(Shanghai) Co., Ltd.
No. 41-42, Lane 369, Chuang Ye Road
Jushuo Industrial Zone, Kang Qiao
Shanghai, 201319
Tel.: +86 21 68 18 70 00
Fax: +86 21 68 18 71 36
info@stauff.com.cn

KOREA

STAUFF Korea Ltd.
1500-12, Dadae-Dong
Saha-Ku
Pusan, 604-826
Tel.: +82 51 266 6666
Fax: +82 51 266 8866
info@stauff.co.kr

UNITED STATES

STAUFF Corporation
7 Wm. Demarest Place
Waldwick, 07463-1542
New Jersey
Tel.: +1 201 444 78 00
Fax: +1 201 444 78 52
sales@stauffusa.com

FRANCE

STAUFF S.A.S.
230, Avenue du Grain d'Or
Z.I. de Vineuil - Blois Sud
41354 Vineuil-cedex
Tel.: +33 2 54 50 55 50
Fax: +33 2 54 42 29 19
direction@stauffsa.com

NEW ZEALAND

STAUFF Corporation (NZ) Ltd.
P. O. Box 58517
Greenmount, Auckland
Unit D, 103 Harris Road
East Tamaki, Auckland
Tel.: +64 9 271 48 12
Fax: +64 9 271 48 32
info@stauff.co.nz

Globally available through
wholly-owned branches and
distributors in all industrial
countries.

GERMANY
WALTER STAUFFENBERG GmbH & Co. KG

P. O. Box 1745
D-58777 Werdohl
Im Ehrenfeld 4
D-58791 Werdohl
Tel.: +49 23 92 916-0
Fax: +49 23 92 2505
filtrationtechnology@stauff.com
www.stauff.com