

# Trunnion Ball Valves

High Technology Valve & Fitting Series



## Introduction



SUPERLOK High Pressure Ball Valves provide reliable shut-off or switching functions. The upper and lower trunnion bearings enhance the resistance of the trunnions against seizure, and increase the valve life in extreme applications. The compact and rugged design employs spring-loaded seats for high cycle life and low operating torques at pressures up to 10,000psig (689bar).

## Features


- PEEK trunnion bearings for longer cycle life
- Two-way and three way designs
- Blow-out resistant two-piece ball/stem
- Low operating torque
- Panel mountable to 9.7mm thickness
- Handle indicates direction of flow
- Positive handle stops
- 100% factory tested
- Compact, maximum flow design

## Specifications

- **Pressure rating** : 10,000psig(689bar) with PEEK Seats  
: 6,000psig(414bar) with PCTFE Seats
- **Temperature rating** : 0°F to 450°F(-17°C to 232°C)
- **Body material** : Stainless steel
- **Body configurations** : Two-way and three-way
- **Port connections** : 1/8" to 1/2" and 6mm to 12mm  
Variety of end connection

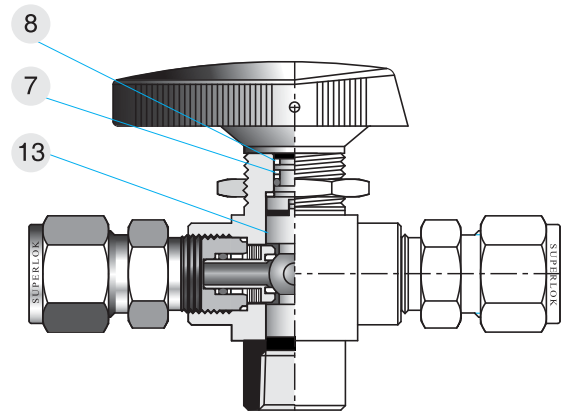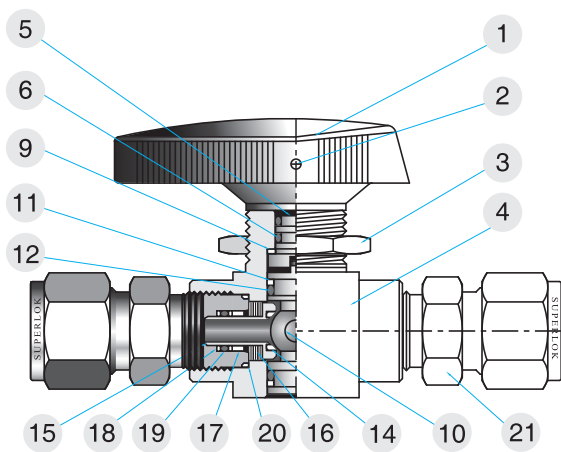

Component	BT Series (6,000psig)		BTH Series (10,000psig)	
	2-Way	3-Way	2-Way	3-Way
	Material Grade/ASTM Specification		Material Grade/ASTM Specification	
1 Handle	Phenolic with brass insert		Phenolic with brass insert	
2 Set screw	Stainless steel		Stainless steel	
3 Panel nut	SS316/A276		SS316/A276	
4 Body	SS316/A479		SS316/A479	
5 Stem	SS316/A276		SS316/A276	
6 Stem O-ring	Viton		Viton	
7 Stem backup ring 1	-	PEEK	PEEK	
8 Stem backup ring 2	-	PTFE	PTFE	
9 Stem bearing	PEEK		PEEK	
10 Trunnion ball	SS316/A276		SS316/A276	
11 Trunnion backup ring	R-PTFE	-	-	
12 Trunnion O-ring	Viton	-	-	
13 Trunnion bearing	-	PEEK	-	
14 Ball seal	PCTFE / PTFE / PEEK		PEEK	
15 Seal retainer	SS316/A276		SS316/A276	
16 Seal spring	Stainless steel		Stainless steel	
17 Seal guide	SS316/A276		SS316/A276	
18 Retainer backup ring	R-PTFE		R-PTFE	
19 Retainer o-ring	Viton		Viton	
20 Connection seal	PTFE		PTFE	
21 End Connection	SS316/A479		SS316/A479	

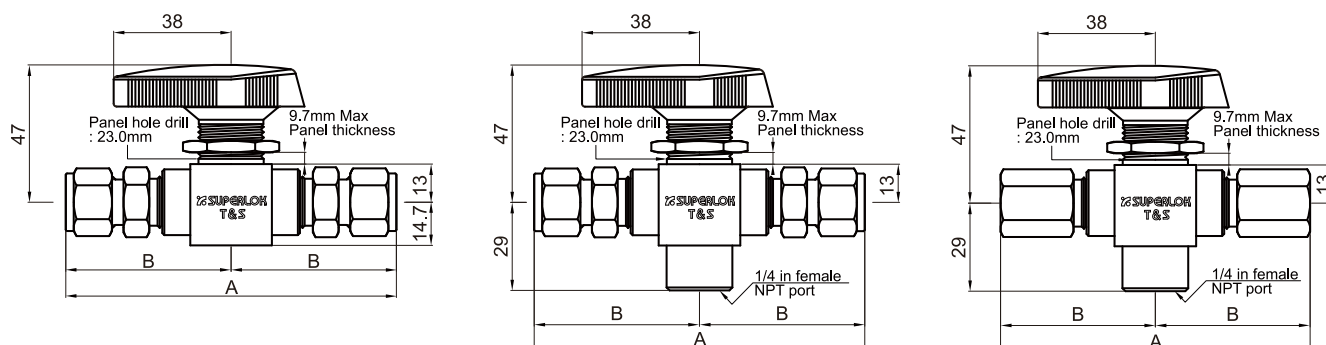

### 2 WAY VALVE ORIFICE : 4.8mm

BT Series Order Number	BTH Series Order Number	End Connection Inlet & Outlet	CV	Dimensions (mm)	
				A	B
SBT2-F-2N	SBTH2-F-2N	1/8" Female NPT	1.2	74.7	37.3
SBT2-2-F-4N	-	1/4" Female NPT	1.0	74.7	37.3
-	SBTH2-F-4N	1/4" Female NPT	1.0	99.8	50.0
SBT2-S-4	SBTH2-S-4	1/4" SUPERLOK	1.6	105	52.6
SBT2-S-6	SBTH2-S-6	3/8" SUPERLOK	1.4	112	55.6
SBT2-S-8	SBTH2-S-8	1/2" SUPERLOK	1.0	117	58.4
SBT2-S-6M	SBTH2-S-6M	6mm SUPERLOK	1.6	105	52.6
SBT2-S-8M	SBTH2-S-8M	8mm SUPERLOK	1.5	105	52.6
SBT2-S-10M	SBTH2-S-10M	10mm SUPERLOK	1.3	112	55.9
SBT2-S-12M	SBTH2-S-12M	12mm SUPERLOK	1.0	117	58.4

### 3 WAY VALVE ORIFICE : 4.8mm


SBT3-F-2N	SBTH3-F-2N	1/8" Female NPT	0.75	74.7	37.3
SBT3-F-4N	-	1/4" Female NPT		74.7	37.3
-	SBTH3-F-4N	1/4" Female NPT		99.8	50.0
SBT3-S-4	SBTH3-S-4	1/4" SUPERLOK		105	52.6
SBT3-S-6	SBTH3-S-6	3/8" SUPERLOK		112	55.6
SBT3-S-8	SBTH3-S-8	1/2" SUPERLOK		117	58.4
SBT3-S-6M	SBTH3-S-6M	6mm SUPERLOK		105	52.6
SBT3-S-8M	SBTH3-S-8M	8mm SUPERLOK		105	52.6
SBT3-S-10M	SBTH3-S-10M	10mm SUPERLOK		112	55.9
SBT3-S-12M	SBTH3-S-12M	12mm SUPERLOK		117	58.4

\* Dimensions based on SUPERLOK nuts finger-tight . Dimensions are reference only, subject to change

## Technical Data

Seat Material	Temperature Rating °F(°C)	Pressure Rating at 100°F(37°C) psig (bar)
		Stainless Steel
<b>BT Series</b>		
PCTFE	0 to 250 (-17 to 121)	6000 (413)  1500 (103)
PEEK	0 to 450 (-17 to 232)	
PTFE		
<b>BTH Series</b>		
PEEK	0 to 450 (-17 to 232)	6000 to 10,000 (413 to 689) depending on end connection

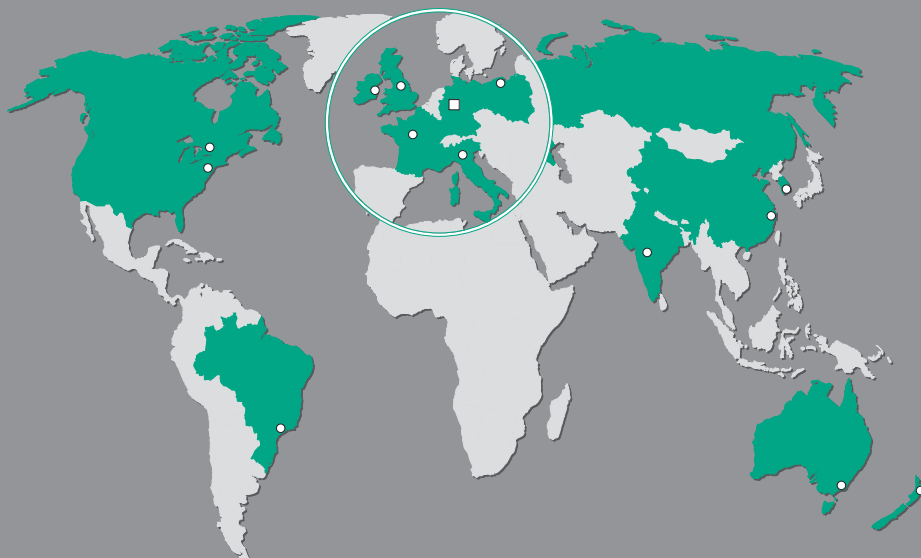


**AUSTRALIA**

STAUFF Corporation Pty. Ltd.  
P. O. Box 227  
Unanderra, NSW, 2526  
24-26 Doyle Avenue  
Unanderra, Wollongong, NSW, 2526  
Tel.: +61 2 4271 18 77  
Fax: +61 2 4271 84 32  
sales@stauff.com.au

**BRAZIL**

STAUFF Brasil Ltda.  
Avenida Gupê 10767  
Galpão 2 - Bloco A  
Barueri - São Paulo  
CEP 06422-120  
Tel.: +55 11 47 72 72 00  
Fax: +55 11 47 72 72 10  
stauff@stauffbrasil.com

**CANADA**

STAUFF Canada Ltd.  
866 Milner Avenue  
Scarborough  
Ontario M1B 5N7  
Tel.: +1 416 282 46 08  
Fax: +1 416 282 30 39  
sales@stauffcanada.com

**CHINA**

STAUFF International Trading  
(Shanghai) Co., Ltd.  
No. 41-42, Lane 369, Chuang Ye Road  
Jushuo Industrial Zone, Kang Qiao  
Shanghai, 201319  
Tel.: +86 21 68 18 70 00  
Fax: +86 21 68 18 71 36  
info@stauff.com.cn

**FRANCE**

STAUFF S.A.S.  
230, Avenue du Grain d'Or  
Z.I. de Vineuil - Blois Sud  
41354 Vineuil-cedex  
Tel.: +33 2 54 50 55 50  
Fax: +33 2 54 42 29 19  
direction@stauffsa.com

**GERMANY**

**WALTER STAUFFENBERG GmbH & Co. KG**  
P. O. Box 1745  
D-58777 Werdohl  
Im Ehrenfeld 4  
D-58791 Werdohl  
Tel.: +49 23 92 916-0  
Fax: +49 23 92 2505  
filtrationtechnology@stauff.com  
www.stauff.com

**INDIA**

STAUFF India Pvt. Ltd.  
Gat. No. 2340  
Pune Nagar Road, Wagholi  
Pune, 412207  
Tel.: +91 20 6620 2473  
Fax: +91 20 2705 1567  
sales@stauffindia.com

**ITALY**

STAUFF Italia s.r.l.  
Viale Nuova Valassina 78  
angolo Via Baragiola sn  
20033 Desio (MI)  
Tel.: +39 0362 63 80 70  
Fax: +39 0362 63 80 69  
sales@stauff.it

**IRELAND**

STAUFF Ireland Ltd.  
Unit B3  
Weatherwell Business Park  
Clondalkin  
Dublin 22  
Tel.: +353 1457 4936  
Fax: +353 1467 0687  
sales@stauff.ie

**KOREA**

STAUFF Korea Ltd.  
1500-12, Dadae-Dong  
Saha-Ku  
Pusan, 604-826  
Tel.: +82 51 266 6666  
Fax: +82 51 266 8866  
info@stauff.co.kr

**NEW ZEALAND**

STAUFF Corporation (NZ) Ltd.  
P. O. Box 58517  
Greenmount, Auckland  
Unit D, 103 Harris Road  
East Tamaki, Auckland  
Tel.: +64 9 271 48 12  
Fax: +64 9 271 48 32  
info@stauff.co.nz

**POLAND**

STAUFF Polska Sp. z o.o.  
Miszewko 43 A  
80-297 Banino  
Tel.: +48 58 660 11 60  
Fax: +48 58 629 79 52  
sales@stauff.pl

**RUSSIAN FEDERATION**

STAUFF LLC  
Office 205, Building 7  
Scharikopodschipnikovskaya 11  
Moscow, 115088  
Tel.: +7 495 987 36 29  
+7 495 223 89 61  
Fax: +7 495 679 90 48  
sales@stauff.ru

**UNITED KINGDOM**

STAUFF UK  
Unit B3  
500, Carlisle Street East  
Off Downgate Drive  
Sheffield, S4 8BS  
Tel.: +44 114 251 85 18  
Fax: +44 114 251 85 19  
sales@stauff.co.uk

**UNITED STATES**

STAUFF Corporation  
7 Wm. Demarest Place  
Waldwick, 07463-1542  
New Jersey  
Tel.: +1 201 444 78 00  
Fax: +1 201 444 78 52  
sales@stauffusa.com

Globally available through  
wholly-owned branches and  
distributors in all industrial  
countries.

STAUFF